
Data sheet MA-12 / MA-16

Siding board for drained and back ventilated rainscreen systems

MA-12 / MA-16 are a durable aluminum architectural boards, which can be installed both vertically and horizontally.

ISOMETRIC VIEW

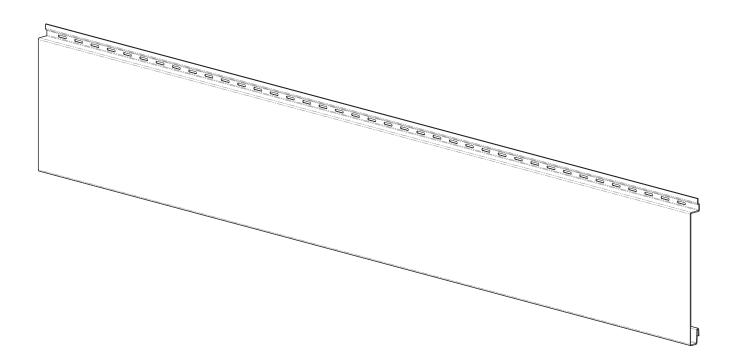

General Specifications

SPECIFICATIONS

- Quick installation; customizable on site.
- Non-combustible panels.
- Durable and fully recyclable once it reaches the end of its useful life.
- Eco-friendly (solvent-free) powder coating providing more stable and resistant colours over time.

PERFORMANCE CRITERIA

- Maximum transverse deflection under service loads is limited to L/60.
- Maximum axial deflection under service loads is limited to L/180.

MATERIAL

• Aluminum 5000 series. 2 mm (5/64") thick.

FINISH/COLOUR

- Electrostatic powder coating in accordance with AAMA 2604, and 2605 standards.
- · Colour at the customer's choice.

USAGE

- Indoor use as decorative boards.
- Outdoor use as exterior wall siding.*†

Data sheet MA-12 / MA-16 (continued)

Technical Specifications

DIMENSIONS

- Height:
 - **MA-12** 304,8 mm (12") and **MA-16** 406,4 mm (16").
- Lenght:
- 304.8 mm to 3022.6 mm (12" to 119").
- · Other dimensions can be achieved on request.

TOLERANCES


• ± 0.127 mm ($\pm 1/1064$ ") over the board's length.

INSTALLATION

- The installer is responsible for sizing the board's substrate.
- He is also responsible for choosing minimum spacing and sizing of the board fasteners.

Technical Details



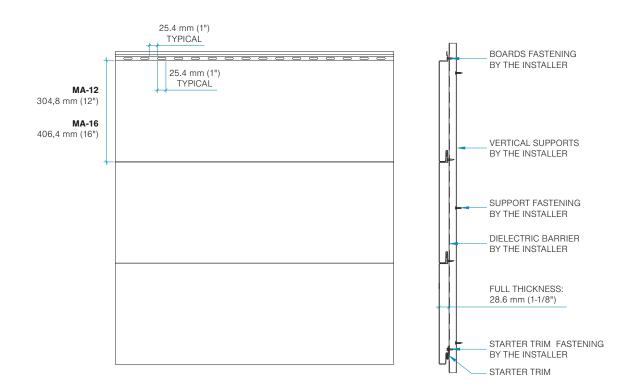

All information contained in this data sheet is the sole property of Maibec. Any reproduction in whole or in part without Maibec's written permission is prohibited.