


Data sheet MA-12 / MA-16

# Siding board for drained and back ventilated rainscreen systems

MA-12 / MA-16 is a durable aluminum architectural board, which can be installed both vertically and horizontally.

## ISOMETRIC VIEW

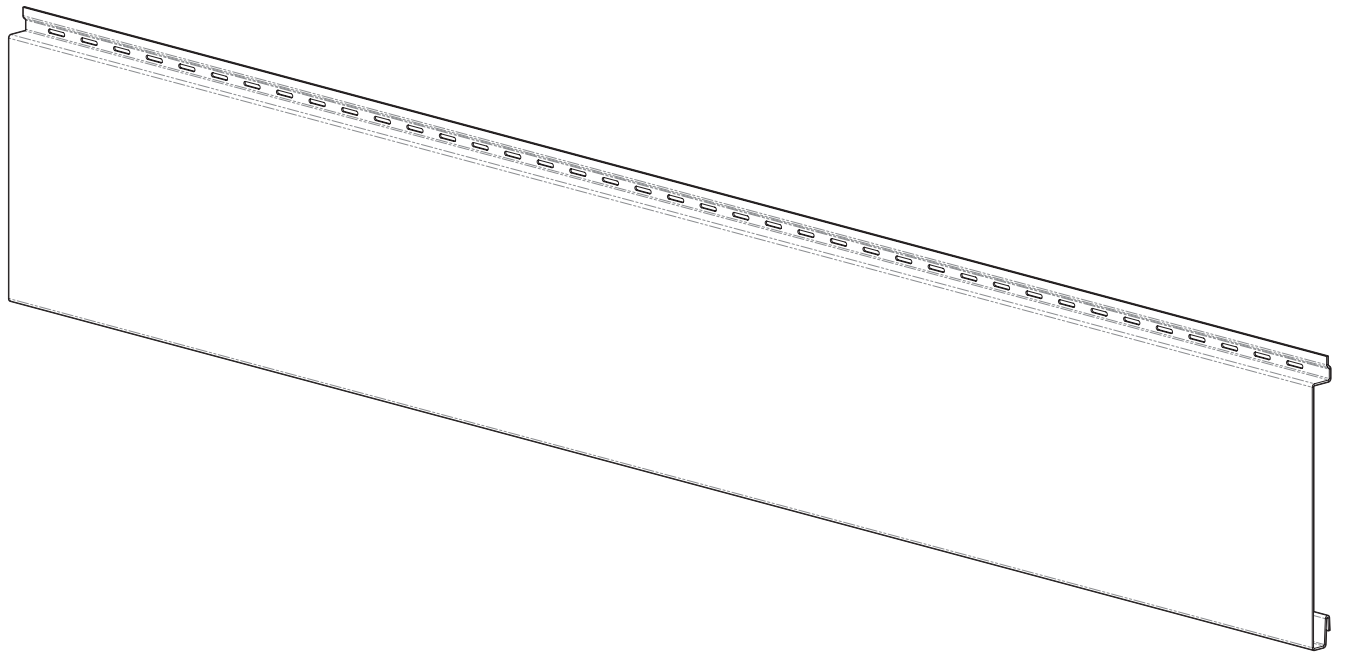

## General Specifications

### SPECIFICATIONS

- Quick installation; customizable on site.
- Non-combustible panels.
- Durable and fully recyclable once it reaches the end of its useful life.
- Eco-friendly (solvent-free) powder coating providing more stable and resistant colours over time.

### USAGE

- Indoor use as decorative boards.
- Outdoor use as exterior wall siding.\*\*

### PERFORMANCE CRITERIA

- Maximum transverse deflection under service loads is limited to L/60.
- Maximum axial deflection under service loads is limited to L/180.

### MATERIAL

- Aluminum 5000 series. 2 mm (5/64") thick.

### FINISH/COLOUR

- Electrostatic powder coating in accordance with AAMA 2604, and 2605 standards.
- Colour at the customer's choice.

### DIMENSIONS

- Height: 304.8 mm (12" MA-12) and 406,4 mm (16" MA-16).
- Width: 304.8 mm to 3022.6 mm (12" to 119").
- Other dimensions can be achieved on request.

### TOLERANCES

- $\pm 0.127$  mm ( $\pm 1/1064$ ") over the board's length.


## Data sheet MA-12 / MA-16 (continued)

### Installation

The installer is responsible for sizing the board's substrate.

He is also responsible for choosing minimum spacing and sizing of the panel fasteners.

### Additional specifications

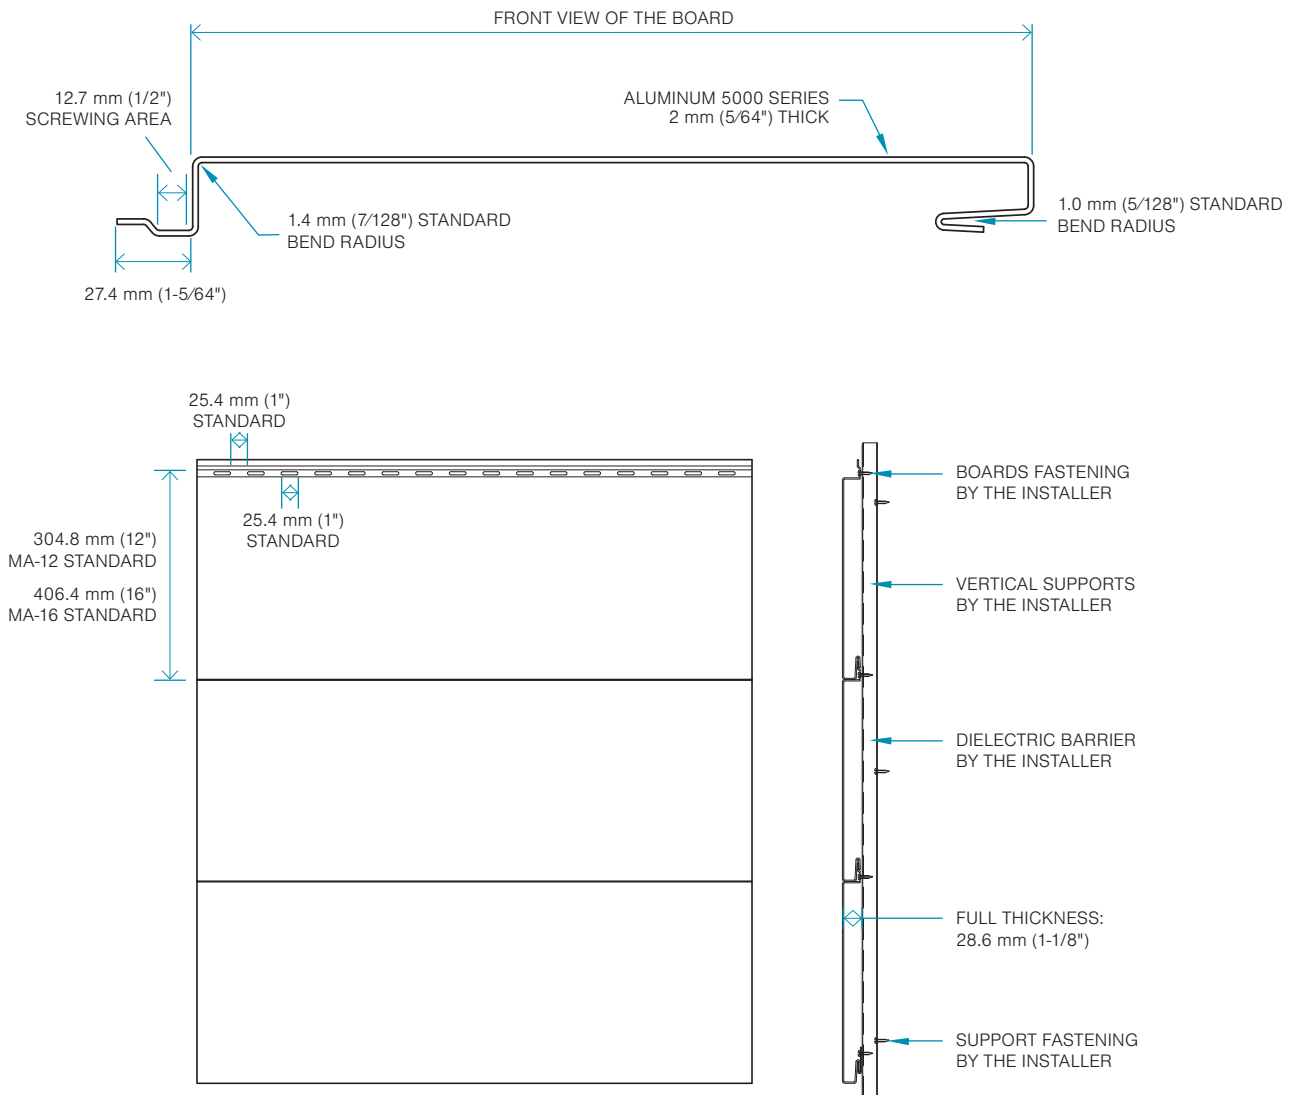

► All information contained in this data sheet is the sole property of Maibec.  
Any reproduction in whole or in part without Maibec's written permission is prohibited.