



Natural stone siding holds multiple benefits thanks to its quasi-eternal life cycle combined with an impressive versatility! Our access to local quarries helps us greatly with quality control, as well as keeping the supply chain wait times at a minimum.



SIDING PANEL FOR DRAINED AND BACK VENTILATED RAINSCREEN SYSTEMS

SPECIFICATIONS

- > To be installed as a back-ventilated system with concealed fasteners.
- > Optimal dimensions provided as recommendations.

APPLICATIONS

- > Outdoor use as exterior wall siding.*
- > Indoor use as decorative panels.

* To use these panels in a rainscreen system, the backing wall must be designed according to local building codes and standards in force by a competent building envelope professional.

The information contained in this product sheet is the sole property of Hurtubise. Any reproduction in whole or in part without Hurtubise's written permission is prohibited.

PERFORMANCE CRITERIA

- > Durable aluminum substructure allowing for independent movement between floors as well as the expansion and contraction movement caused by heat loads.
- > Hurtubise issues recommendations on the appropriate granite thickness and fastening systems.
- > Hurtubise's engineering department takes care of both stress and applied load testing.
- > Maximum deflection under service loads is limited to L/600.

MATERIAL

- > Granite panels from 10 mm to 30 mm [0.394" to 1.181"] thick.


FINISH AND COLOURS

- > Colour charts available.

SIZE

- > Dimensions are custom cut, up to a maximum of 609.6 mm x 1828.8 mm [24" x 72"].
- > Other sizes may be available upon special request.

- > Thickness: 10 mm to 30 mm [0.394" to 1.181"].
- > Visible joint: 5 mm to 10 mm [0.197" to 0.394"].
- > Concealed fasteners are compatible with panel thicknesses between 10 mm and 30 mm [0.394" to 1.181"], whereas kerf stone anchoring must be used for sizes greater than 30 mm [1.181"].

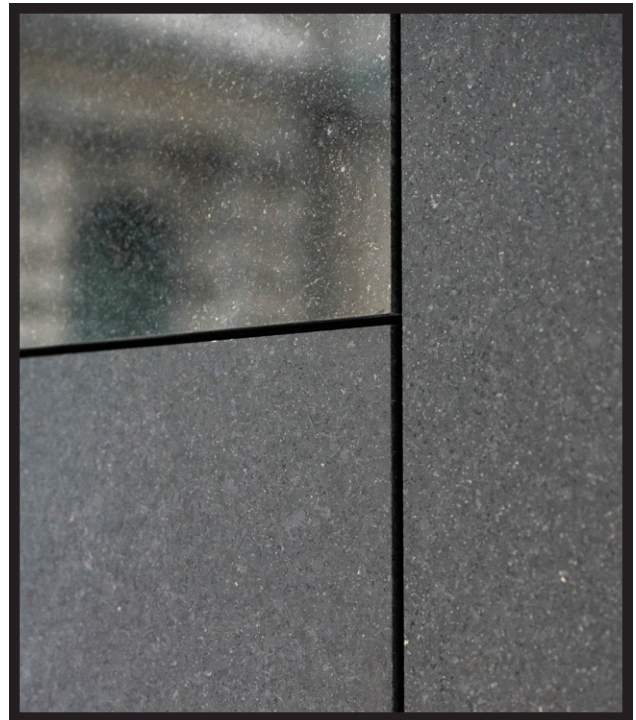

PERSONALIZED SUPPORT

When you start a project with us, you will have a single contact assigned for the duration of our collaboration. This will allow us to build a stable relationship with you, to better evaluate your needs and answer your questions.

ON-SITE DELIVERY

Simple, fast and without intermediaries! With our direct delivery service, you can choose the precise moment when you wish to receive your custom cut panels, all pre-sorted and identified by section (wall/floor), straight to your building site.



The information contained in this product sheet is the sole property of Hurtubise. Any reproduction in whole or in part without Hurtubise's written permission is prohibited.

v.1 – 2023-02-08