
川 HURTUBISE

v. 1 – 2023-02-07

SH-13

1/2

SIDING BOARD FOR DRAINED AND BACK VENTILATED RAINSCREEN SYSTEMS

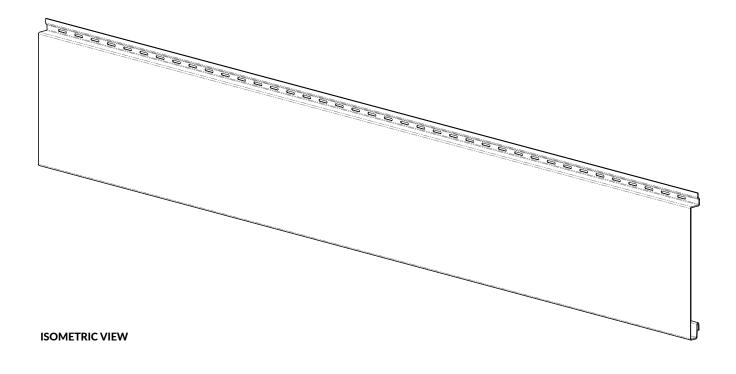

DESCRIPTION

SH-13 is a durable aluminum architectural board, which can be installed both vertically and horizontally.

SPECIFICATIONS

- > Quick installation; customizable on site.
- > Non-combustible panels.
- > Durable and fully recyclable once it reaches the end of its useful life.
- Eco-friendly (solvent-free) powder coating providing more stable and resistant colours over time.

USAGE

- > Outdoor use as exterior wall siding.*†
- > Indoor use as decorative boards.
 - To use these boards in a rainscreen system, the backing wall must be designed according to local building codes and standards in force by a competent building envelope professional.
 - [†] For buildings of 20 m [65'-6"] or less in height with static wind pressures of 1.25 kPa [26 psf] or less. For any other application, contact Hurtubise's technical service.

PERFORMANCE CRITERIA

- Maximum transverse deflection under service loads is limited to L/60.
- Maximum axial deflection under service loads is limited to L/180.

MATERIAL

> Aluminum 5000 series.
2 mm [0.078"] thick.

FINISH/COLOUR

- > Electrostatic powder coating in accordance with AAMA 2603, 2604, and 2605 standards.
- > Colour at the customer's choice.

All information contained in this data sheet is the sole property of Hurtubise. Any reproduction in whole or in part without Hurtubise's written permission is prohibited.



DATA SHEET

SH-13 (continued)

2/2

DIMENSIONS

- > Height: 304.8 mm [12"].
- > Width: 304.8 mm to 3022.6 mm [12" to 119"].
- > Other dimensions can be achieved on request.


TOLERANCES

> ±0.127 mm [±0.005"] over the board's length.

INSTALLATION

- > The installer is responsible for sizing the board's substrate.
- He is also responsible for choosing minimum spacing and sizing of the panel fasteners.

ADDITIONAL SPECIFICATIONS

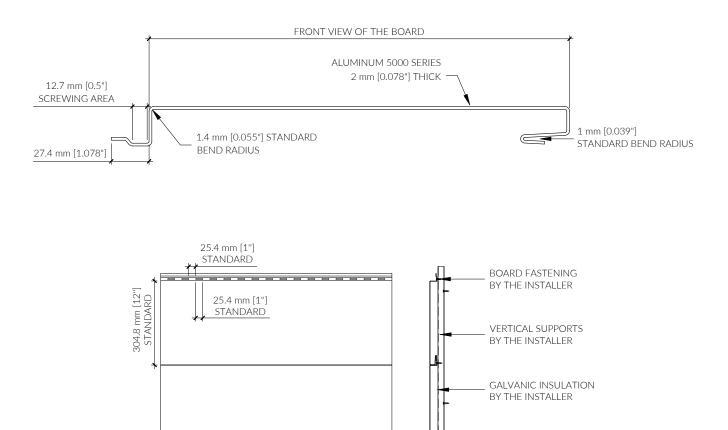

All information contained in this data sheet is the sole property of Hurtubise. Any reproduction in whole or in part without Hurtubise's written permission is prohibited.

FULL THICKNESS: 28.6 mm [1.125"]

SUPPORT FASTENING BY THE INSTALLER